

Quick Deploy™


Specifications and Features

- 9 to 32 Volt operation
- Meets MIL-STD-1275D 28 Volt operation
- LS 454 Speaker audio and mounting
- Dual PTT support for SR nets
- Transformer Isolated Radio audio interface
- Optically isolated Radio PTT interface
- Wide choice of Radio interfaces
- RS-485 interface allows

Wearable Crew stations™

to be located great distances from
main speaker unit and from eachother

Radio interfaceo options

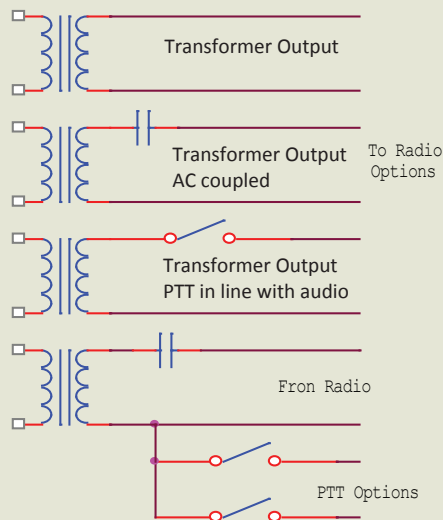

Ordering information

All **Standard Models** are supplied in transportable configuration housed in a Pelican watertight case (16.2" x 12.7" x 6.6").

A **WCS™** and 12ft interconnecting cable are supplied for each crew supported.

Standard Models

- QD66: Supports 6 crew and 6 radios
- QD33: Supports 3 crew and 3 radios
- QD22: Supports 2 crew and 2 radios

Other Options:

- Custom length interconnecting cables
- Transportable battery backup
- Customer specified:
- Power connector, headset adapter cable, radio cable, interface configurations

Note:

Case size may vary depending
on options selected

Contact information

Matrix Microsystems Inc.
qd@matrixmicrosystems.com
516 818 8449
www.matrixmicrosystems.com

Quick Deploy™ Speaker - Intercom with Wearable Crew Stations™



Quick Deploy™ (QD™) supports up to
6 crew members and 6 Radios.
QD™ can be mounted or transportable.



TRANSPORTABLE

or



MOUNTED