

The ED1800 range of switches have been designed to provide a rapid means of disconnecting batteries or other power supplies in the event of serious electrical faults. Designed for use with uninterrupted high current battery powered systems such as those found in Telecommunication Power Distribution Units, all types are capable of safely rupturing full load battery currents in the event of an emergency.


Uninterrupted current - no or infrequent load switching requirements (maintains a lower contact resistance).

The ED1800 is a manually operated device with a snap action for both opening and closing of the main contacts. They have paralleled double breaking contacts with silver alloy tips which are weld resistant, hard wearing and have excellent conductivity. The ED1800 is easy to install (see drilling details) and can be mounted using the main terminal busbars or secured with supplied M5 posidrive mounting screws on the frame of the device.

Precautions:

The switch is to be used to rupture current in an emergency or as a no-load isolator. **Do not use as a regular On-Load Switching Device.**

ED1800



Drilling Details for Mounting

Application	Uninterrupted	
Thermal Current Rating (¹ th)	1800A	
Intermittent Current Rating:		
30% Duty	3285A	
40% Duty	2845A	
50% Duty	2545A	
60% Duty	2325A	
70% Duty	2150A	
Rated Fault Current Breaking Capacity (I cn) Resistive Load: (in accordance with UL508*)		
ED1800	2700A at 60v D.C.	

ED1800 2700A at 60v D.C.

Maximum Recommended Contact Voltages (Ue):

ED1800 60V D.C.

Typical Voltage Drop per pole across New Contacts at 100A

Mechanical M.T.B.F >10,000

Operating Ambient Temperature -40°C to +60°C

Guideline Contactor Weight:

ED1800 2750 gms

Copper busbar	965mm ² [1.49inch ²]
Key: ✓ = Uninterrupted	

Advised Connection Sizes for Maximum Continuous Current


Note: Where applicable values shown are at 20°C


* Please check our web site for product UL status


Performance data provided should be used as a guide only. Some de-rating or variation from figures may be necessary according to application

Thermal current ratings stated are dependant upon the size of conductor

- being used
 For further technical advice email: technical@albrightinternational.com
- Albright reserve the right to change data without prior notice

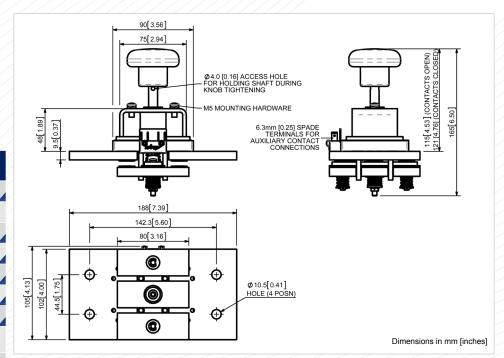

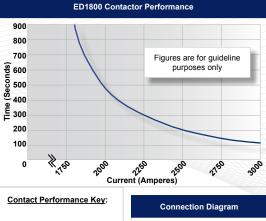



General		Suffix	
Auxiliary Contacts	0	Α	
Auxiliary Contacts - V3	X		
Magnetic Blowouts†	Х		
Magnetic Blowouts - High Powered [†]	Х		
Mounting Brackets	Х		
Closed Contact Housing	Х		
Environmentally Protected IP66	Х		
EE Type (Steel Shroud)	Х		
Lockable	Х		
Contacts			
Large Tips	x		
Textured Tips	X		
Silver Plating (fitted as standard)	0		
Key: Optional ∘ Standard • No	ot Availab	le X	
† Connections become polarity sensitive			

ED1800 Available Options

Uninterrupted

Current